


Chuck With End Stop

The chuck is suitable for short-shaft workpieces and is also compatible with long-shaft workpieces.

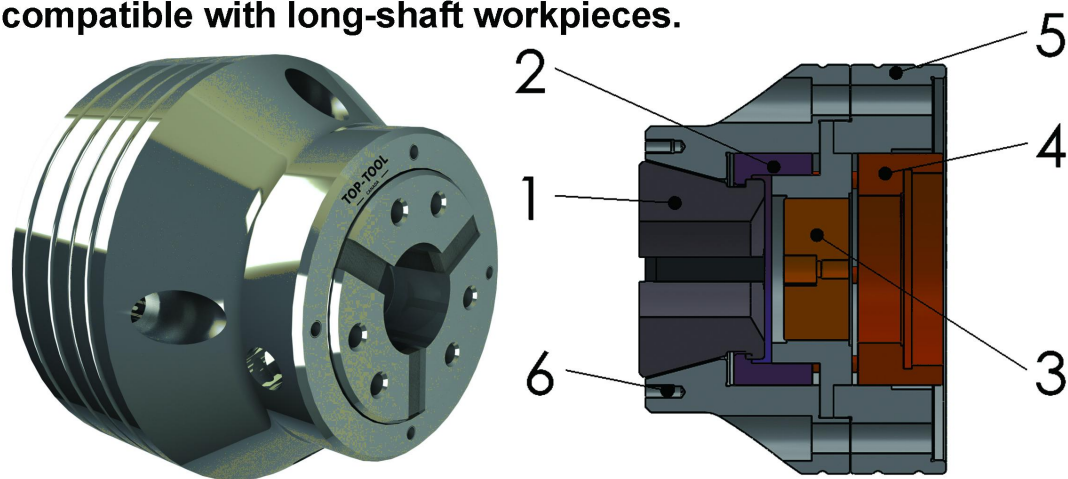

Designation	
1	Clamping head vulcanized with hardened steel segments and pull-down effect
2	Claming head push-pull ring
3	End Stop
4	Draw tube connection mounting threads
5	Flange of the Spindle
6	Front stop mounting threads

	Stroke[mm]	Max. Pulling Force[kN]	Max. Radial Clamping Force[kN]	Max. Clamping Diameter[mm]	Recommended Workpiece Tolerance[mm]	Max. Speed[1/min.]
32	2.5+3	25	70	32	±0.3	8000
42	2+2.5	35	80	42	±0.5	7000
52	2+2.5	40	94	52	±0.5	7000
65	2+2.5	45	105	65	±0.5	6000
80	2+2.5	50	115	80	±0.5	5500
100	3+5	65	150	100	±1.0	5000
125	3+6	70	165	125	±1.0	3200
160	3+3	100	235	160	±1.0	3200

For more models, please contact us to request information.