


Hydraulic Face Driver

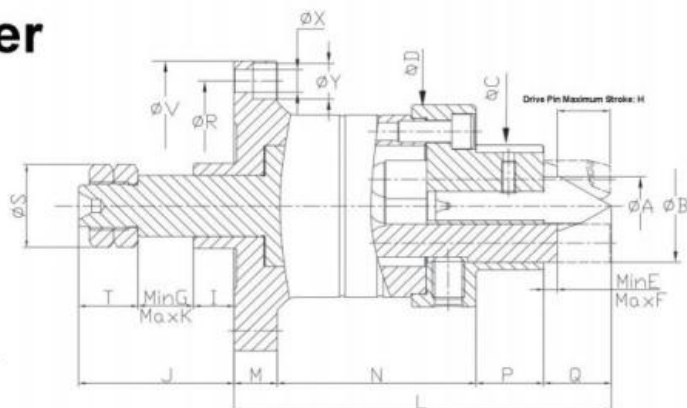

Working Range[mm]	12-50	15-55	20-60	20-70	45-120	100-220	180-300
Left-hand model L	LD12/50	LD15/55	LD20/60	LD20/70	LD45/12	LD100/220	LD180/300
Right-hand model R	RD12/50	RD15/55	RD20/60	RD20/70	RD45/12	RD100/220	RD180/300
A	18	18	18	22	20	32	35
Q	19.5	19.5	19.5	25	28	36	49
B	28.3	31.3	35.3	42.3	75	112.3	152.3
H	19.5	19.5	19.5	19.5	19	26	26.5
E	1	1	1	5	9	9	17.5
F	20.5	20.5	20.5	24.5	28	35	46.5
C	35	40	43	48	80	117.5	160
D	63	63	63	74	116	157	207
L	133.5	133.5	133.5	139.5	157	203	242
N	68	68	68	73.5	77	104	133
P	30	30	30	25	32	35	25
J	61	61	61	57.5	65	77	90.5
G	1	1	1	1	1	1	1
K	20.5	20.5	20.5	20.5	20	27	27.5
T	22	22	22	22	25	25	38
I	18.5	18.5	18.5	15	20	25	25
V	109	109	109	109	153	195	245
M	16	16	16	16	20	28	35
S	31	31	31	31	34.6	34.6	53
R	94	94	94	94	131	170	223
X	8.5	8.5	8.5	8.5	11	13	12
Y	13.5	13.5	13.5	13.5	17	19	19